


Specifications



Video/Audio Input	
IP Camera accrss:	16-ch
Two-way audio input:	1-ch, RCA (2.0 Vp-p, 1kΩ)
Video/Audio Output	
HDMI/VGA output:	1-ch, resolution:
	1920 × 1080p/60Hz, 1600x1200p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Recording Resolution:	6 MP/5 MP/4 MP/3 MP 1080p/UXGA/720p/ VGA/4CIF/DCIF/2CIF/CIF/QCIF
Frame Rate:	Main stream: 50 fps (P) / 60 fps (N)
	Sub-stream: 50 fps (P) / 60 fps (N)
Audio Output:	1-ch, RCA (Linear, 1kΩ)
Synchronous Playback:	8-ch
Decoding	
Live view / Playback:	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2
Capability:	16-ch@4CIF, 12-ch@720P, 6-ch@1080P
Hard Disk	
SATA:	2 SATA interfaces for 2 HDDs
Capacity:	Up to 6TB for each disk
Network	
Incoming bandwidth:	160Mbps
Outgoing bandwidth:	80Mbps
Maximum Visitors:	128
POE	
Interface:	16 independent 100 Mbps PoE network interfaces
Max. Power:	200W
Supported Standard:	AF & AT
Interfaces	
Network Interface:	1RJ-45 10/1000Mbps self-adaptive Ethernet interface
USB Interface:	1 × USB 2.0 and 1 × USB 3.0
Alarm I/O:	4 / 1
General	
Power Supply:	100~240V AC
Consumption(without hard disk and POE):	≤ 15W
Working Temperature:	-10 °C ~ +55 °C
Working Humidity:	10 % ~ 90 %
Chassis:	380 chassis
Dimensions:	380 × 290 × 48mm (15.0" × 11.4" × 1.9")
Weight(without HDD):	≤ 1 Kg (2.2 lb)

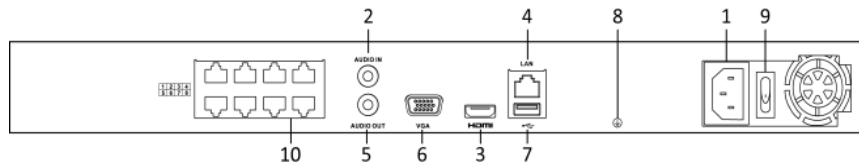

DS-608-8P



The rear panel of DS-N616-16P provides 16 independent 100 Mbps PoE network interfaces.

Index	Name
1	Power Supply
2	Audio In
3	HDMI Interface
4	LAN Network Interface
5	Audio Out
6	VGA Interface
7	USB Interface
8	Ground
9	Power Switch
10	Network Interfaces with PoE Function